


PATH DATA-SHEET

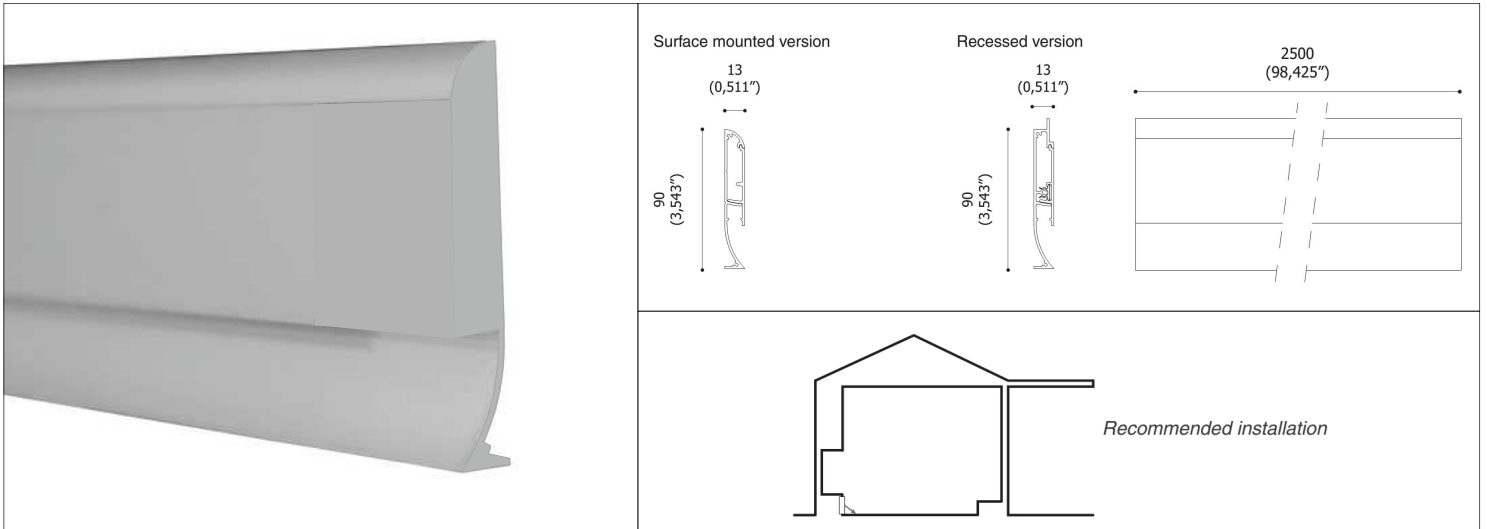

PRODUCT DESCRIPTION:

Indoor skirting board with uniform indirect light.
UV resistance of all materials.

TECHNICALS FEATURES:

Materials	Aluminium alloy extrusion UNI 6060 ; Polycarbonate
Finishes	Anodized aluminium 20 micron ; painted white
Light Source	Optional strip flex LED max 9mm (0,354") width
Optics	Optional diffusive screen*
Weigth	880 g/m (9,46 oz/ft)
Installations	Surface or recessed mounted (wall)



NOTE:

Power supplies, strip flex LED light, control&dimming devices, connectors, wires and fixing kits must to be orderd separately.
Aldabra power supply consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

PATH DATA-SHEET

GENERAL FEATURES:

	length mm (in)
PAT.02.XXXXX.X	2500 (98,425")
PAT.04.XXXXX.X	2500 (98,425")

FINISHES FEATURES:

PAT.XX.XXXA1.X	Anodized aluminium
PAT.XX.XXXW1.X	White aluminium

GENERAL INFORMATION:

Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

PATH DATA-SHEET

ACCESSORIES:

ACC.0180.0

Light kit strip LED 5m (16,4ft)
50W 24Vdc 2700K



ACC.0181.0

Light kit strip LED 5m (16,4ft)
50W 24Vdc 3000K



ACC.0182.0

Light kit strip LED 5m (16,4ft)
50W 24Vdc 4000K



ACC.0186.0

Adhesive diffuser 2500 mm
(94,425in) opal
polycarbonate



ACC.0162.0

Hooks for cable fixing
(10 pieces bag)



ACC.0003.0

Alignment kit



ACC.0159.0

Bipolar cable 2x0,75mm² (AWG18)
50 m reel (164 ft)



ACC.0156.0

Couple of end caps
for recessed version
- stainless steel




ACC.0183.0

Couple of end caps
for recessed version
- white



ACC.0157.0

Couple of end caps
for recessed version
- stainless steel



ACC.0184.0

Couple of end caps
for recessed version
- white



ECG.0030.0

Dimmer module 24 Vdc
with cables

