


ALDABRA

PROFESSIONAL EXTERIOR LIGHTING

ATLAS High Power Monochromatic

DATA-SHEET

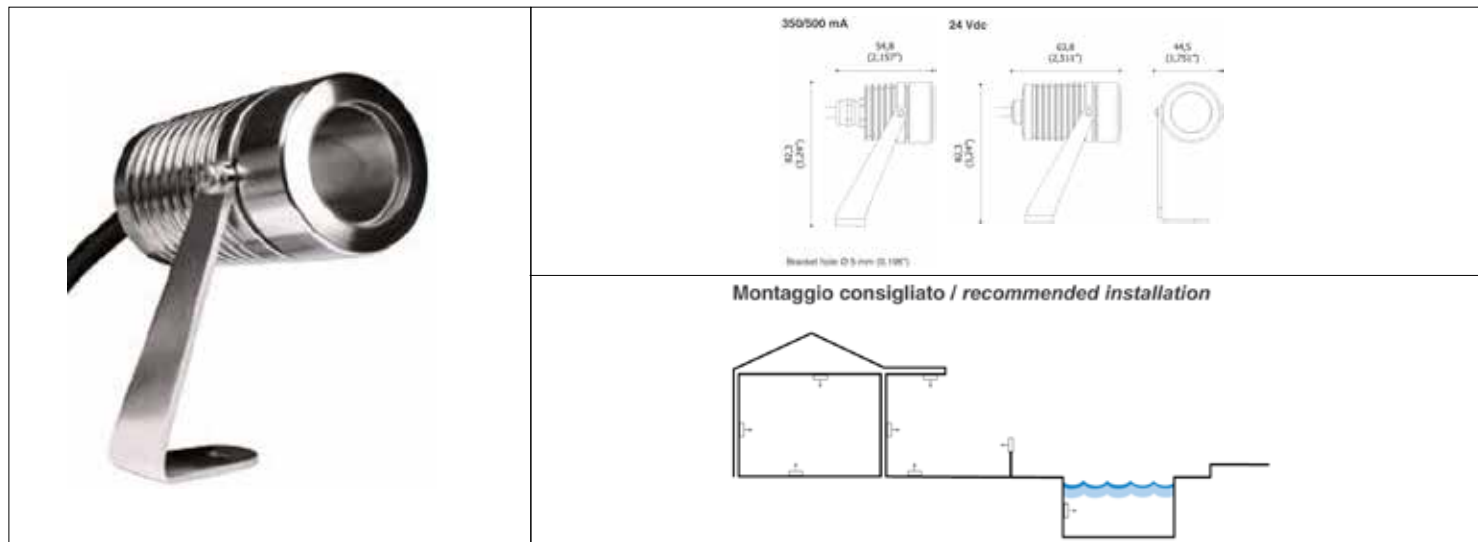

PRODUCT DESCRIPTION:

Professional compact mini-floodlight for direct and indirect lighting suitable for indoor, outdoor and underwater settings. Body finished anodized aluminium or satin stainless steel. All the materials are suitable for use in swimming pools*, fountains and with salt water. UV resistance of all materials. (*not for USA and Canada)

TECHNICALS FEATURES:

Materials	Stainless steel AISI 316L or aluminium
Body Finishes	Stainless steel AISI 316L or aluminium
Front Finishes	Satin stainless steel AISI 316L or anodized aluminium
Screen	Transparent or satin tempered flat glass
Fixing brackets	Stainless steel AISI 316L
Gaskets	Silicone rubber, teflon
Power Supply	350/500 mA constant current - 24 Vdc constant voltage
Power	4/6 W (350/500 mA) ; 6,7 W (24 Vdc)
Light Source	High Power LED 105-130 lm/W LM 80 COMPLIANT
Color Temperature	2700 K ; 3000 K ; 4000 K
Ra	> 80
Chromatic Selection	Mac-Adam 2-step
Lifetime	> 50000 h (TM21 L80 B10 @50000h)
Optics	24° ; 48° ; Satin diffuser 97°
Tc metal body	< 90 °C (194 °F)
Ta operating temperature	- 30 ÷ 50 °C (-22 ÷ 122 °F)
Functions	On/Off ; dimmable
Cable	350/500 mA: AD8PBS8-F 2x0,5mm ² (AWG20) Red;Black Ø 4,2mm (0,165") L. 1m (3,28 ft). 24 Vdc: AWM style 20233 2x0,75mm ² AWG18 (Red;Black)+1x0,5mm ² AWG20 (Violet) Ø 6 mm (0,236") L. 1m. (3,28 ft)
Weigth	350/500 mA : aluminium 80 g. (2,82 oz) , stainless steel 190 g. (6,7 oz) 24 Vdc : aluminium 110 g. (3,88oz) , stainless steel 260 g. (9,17 oz)
Installations	Surface mounted (wall,floor,ceiling,picked) - immersion
Norms	60598-1 ; 60598-2 and its parts ; UL 676 ; CSA C22.2 No. 89-15 ; UL 2108 ; UL 1598/C250.-08



ATLAS High Power Monochromatic DATA-SHEET

GENERAL FEATURES:

	power supply	power (W)	notes
ATL.03.XXXXX.X	350mA / 500mA	4 / 6*	* Stainless steel 6W version to be used only in permanent immersion
ATL.04.XXXXX.X	24 Vdc	6,7*	* Stainless steel 6,7W version to be used only in permanent immersion

OPTICAL FEATURES:

ATL.XX. F XXXX.X	Medium beam 24°
ATL.XX. W XXXX.X	Wide beam 48°
ATL.XX. S XXXX.X	Satin diffuser 97°
Available with H	Honeycomb spot
Available with K	Honeycomb medium beam
Available with L	Honeycomb satin diffuser


LIGHT FEATURES:

	High Power LED	lm* (350mA)	lm* (500mA/ 24Vdc)	Ra	Chromatic selection
ATL.XX.X 27 XX.X	2700K warm white	305	347	>80	MacAdam 2-step
ATL.XX.X 30 XX.X	3000K warm white	353	401	>80	MacAdam 2-step
ATL.XX.X 40 XX.X	4000K natural white	381	433	>80	MacAdam 2-step


*delivered luminous flux (narrow beam)

FINISHES FEATURES:


ATL.XX.XXX A1 .X	Anodized aluminium
ATL.XX.XXX S1 .X	Satin stainless steel AISI 316L



medium beam 24°



wide beam 48°



satin diffuser 97°

GENERAL INFORMATIONS:

Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must to be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it


ATLAS High Power Monochromatic DATA-SHEET

ACCESSORIES:


ACC.0023.0
regulation knob





ACC.0043.0
universal ground
picket size 1

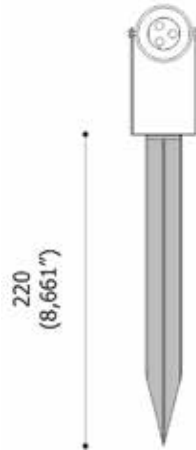

ACC.0044.0
universal ground
picket size 2

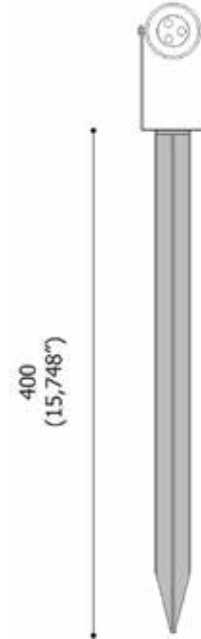

ACC.0045.0
anodized aluminium
asymmetric glare cowl

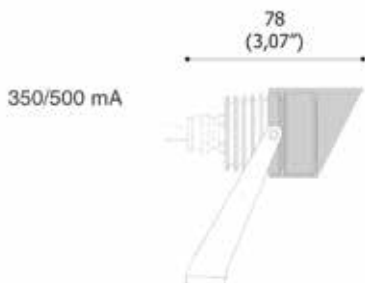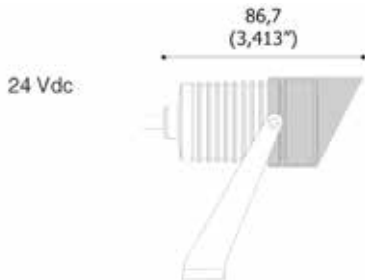

ACC.0155.0 *
stainless steel asymmetric
glare cowl


* special on request

ALDABRA

PROFESSIONAL EXTERIOR LIGHTING

ATLAS Monochromatic

DATA-SHEET

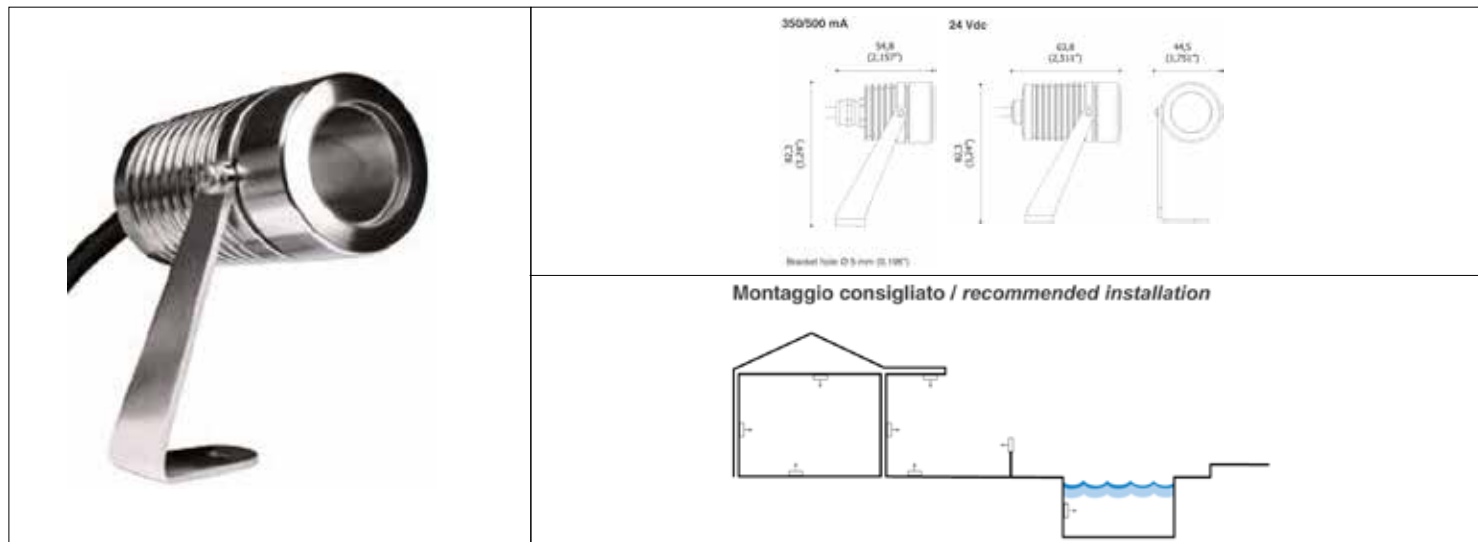

PRODUCT DESCRIPTION:

Professional compact mini-floodlight for direct and indirect lighting suitable for indoor, outdoor and underwater settings. Body finished anodized aluminium or satin stainless steel. All the materials are suitable for use in swimming pools*, fountains and with salt water. UV resistance of all materials. (*not for USA and Canada)

TECHNICALS FEATURES:

Materials	Stainless steel AISI 316L or aluminium
Body Finishes	Stainless steel AISI 316L or aluminium
Front Finishes	Satin stainless steel AISI 316L or anodized aluminium
Screen	Transparent or satin tempered flat glass
Fixing brackets	Stainless steel AISI 316L
Gaskets	Silicone rubber, teflon
Power Supply	350/500 mA constant current - 24 Vdc constant voltage
Power	1/1,5 W (350/500 mA) ; 1,7 W (24 Vdc)
Light Source	Power LED 105-130 lm/W LM 80 COMPLIANT
Color Temperature	2700 K ; 3000 K ; 4000 K
Ra	> 80
Chromatic Selection	Mac-Adam 2-step
Lifetime	> 50000 h (TM21 L80 B10 @50000h)
Optics	9° ; 24° ; 43° ; Transparent diffuser 111° ; Satin diffuser 97°
Tc metal body	< 90 °C (194 °F)
Ta operating temperature	- 30 ÷ 50 °C (-22 ÷ 122 °F)
Functions	On/Off ; dimmable
Cable	350/500 mA: AD8PBS8-F 2x0,5mm ² (AWG20) Red;Black Ø 4,2mm (0,165") L. 1m (3,28 ft). 24 Vdc: AWM style 20233 2x0,75mm ² AWG18 (Red;Black)+1x0,5mm ² AWG20 (Violet) Ø 6 mm (0,236") L. 1m. (3,28 ft)
Weigth	350/500 mA : aluminium 80 g. (2,82 oz) , stainless steel 190 g. (6,7 oz) 24 Vdc : aluminium 110 g. (3,88oz) , stainless steel 260 g. (9,17 oz)
Installations	Surface mounted (wall,floor,ceiling,picked) - immersion
Norms	60598-1 ; 60598-2 and its parts ; UL 676 ; CSA C22.2 No. 89-15 ; UL 2108 ; UL 1598/C250.-08



ATLAS Monochromatic DATA-SHEET

GENERAL FEATURES:

	power supply	power (W)
ATL.01.XXXXX.X	350mA / 500mA	1 / 1,5
ATL.02.XXXXX.X	24 Vdc	1,7

OPTICAL FEATURES:

ATL.XX. M XXXX.X	Narrow beam 9°
ATL.XX. F XXXX.X	Medium beam 24°
ATL.XX. W XXXX.X	Wide beam 43°
ATL.XX. T XXXX.X	Transparent diffuser 111°
ATL.XX. S XXXX.X	Satin diffuser 97°
Available with H	Honeycomb spot
Available with K	Honeycomb medium beam
Available with L	Honeycomb satin diffuser


LIGHT FEATURES:

	Power LED	lm* (350mA)	lm* (500mA/24Vdc)	Ra	Chromatic selection
ATL.XX.X 27 XX.X	2700K warm white	100	137	>80	MacAdam 2-step
ATL.XX.X 30 XX.X	3000K warm white	102	140	>80	MacAdam 2-step
ATL.XX.X 40 XX.X	4000K natural white	105	145	>80	MacAdam 2-step


*delivered luminous flux (narrow beam)

FINISHES FEATURES:


ATL.XX.XXX A1 .X	Anodized alimunium
ATL.XX.XXX S1 .X	Satin stainless steel AISI 316L




spot 9°




medium beam 24°



wide beam 43°



transparent screen



satin screen

GENERAL INFORMATIONS:

Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must to be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power.

Photometric data available at www.aldabra.it

ALDABRA

PROFESSIONAL EXTERIOR LIGHTING

ATLAS Monochromatic


DATA-SHEET

ACCESSORIES:


ACC.0023.0
regulation knob





ACC.0043.0
universal ground
picket size 1

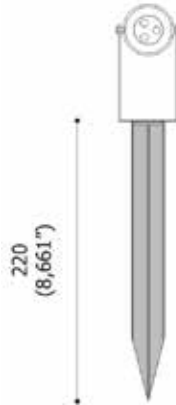

ACC.0044.0
universal ground
picket size 2

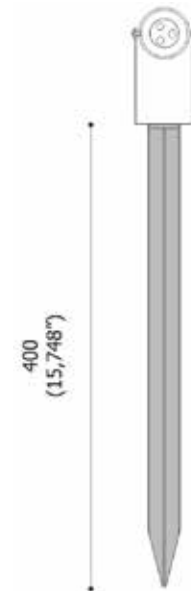


ACC.0045.0
anodized aluminium
asymmetric glare cowl

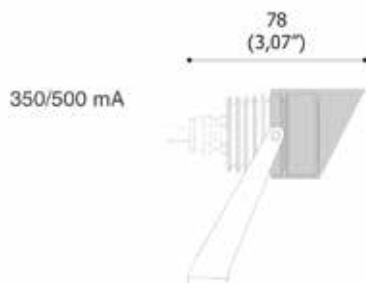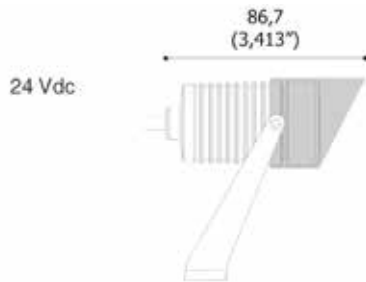

ACC.0155.0 *
stainless steel asymmetric
glare cowl

* special on request

ATLAS RGB DATA-SHEET

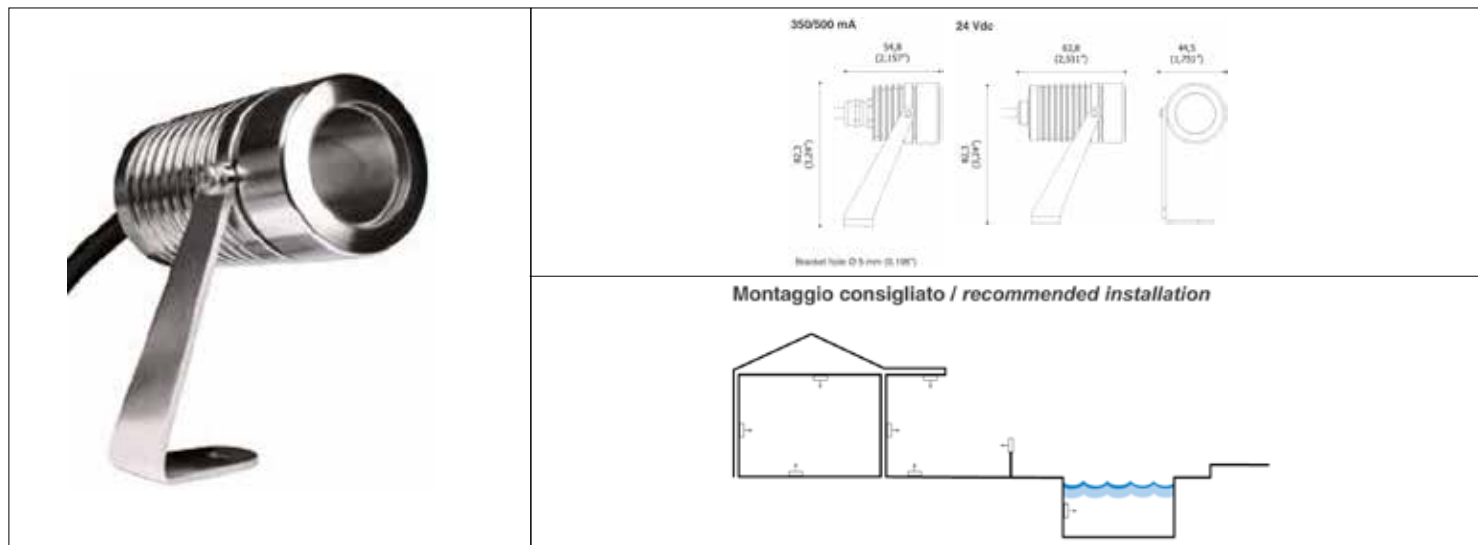

PRODUCT DESCRIPTION:

Professional compact mini-floodlight for direct and indirect lighting suitable for indoor, outdoor and underwater settings. Body finished anodized aluminium or satin stainless steel. All the materials are suitable for use in swimming pools*, fountains and with salt water. UV resistance of all materials. (*not for USA and Canada)

TECHNICALS FEATURES:

Materials	Stainless steel AISI 316L or aluminium
Body Finishes	Stainless steel AISI 316L or aluminium
Front Finishes	Satin stainless steel AISI 316L or anodized aluminium
Screen	Transparent or satin tempered flat glass
Fixing brackets	Stainless steel AISI 316L
Gaskets	Silicone rubber, teflon
Power Supply	24 Vdc constant voltage
Power	4 W
Light Source	Power LED LM 80 COMPLIANT
Dominant Wavelength	R=622nm, G=530nm, B=470nm
Lifetime	> 50000 h (TM21 L80 B10 @50000h)
Optics	45° ; Transparent diffuser 111°
Tc metal body	< 90 °C (194 °F)
Ta operating temperature	- 30 ÷ 50 °C (-22 ÷ 122 °F)
Functions	On/Off ; dimmable
Cable	AWM style 20233 2x0,75mm ² (AWG18) Red;Black+3x0,5mm ² (AWG20) Red/black, Green/black, Blue/black L. 1 m (3,28 ft).
Weigth	24 Vdc : aluminium 110 g. (3,88oz) , stainless steel 260 g. (9,17 oz)
Installations	Surface mounted (wall,floor,ceiling,picked) - immersion
Norms	60598-1 ; 60598-2 and its parts ; UL 676 ; CSA C22.2 No. 89-15 ; UL 2108 ; UL 1598/C250.-08



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power. Photometric data available at www.aldabra.it

ATLAS RGB DATA-SHEET

GENERAL FEATURES:

	power supply	power (W)
ATL.02.XXXXX.X	24 Vdc	4

OPTICAL FEATURES:

ATL.XX. W XXXX.X	Wide beam 43°
ATL.XX. T XXXX.X	Transparent diffuser 111°
Available with H	Honeycomb spot
Available with K	Honeycomb medium beam
Available with L	Honeycomb satin diffuser



LIGHT FEATURES:

	Power LED	lm*
ATL.XX.X 90 XX.X	RGB	58

*delivered luminous flux (wide beam)

FINISHES FEATURES:

ATL.XX.XXX A1 .X	Anodized aluminium
ATL.XX.XXX S1 .X	Satin stainless steel AISI 316L

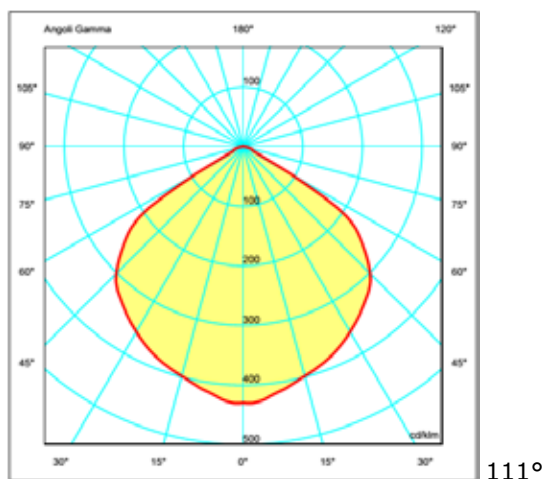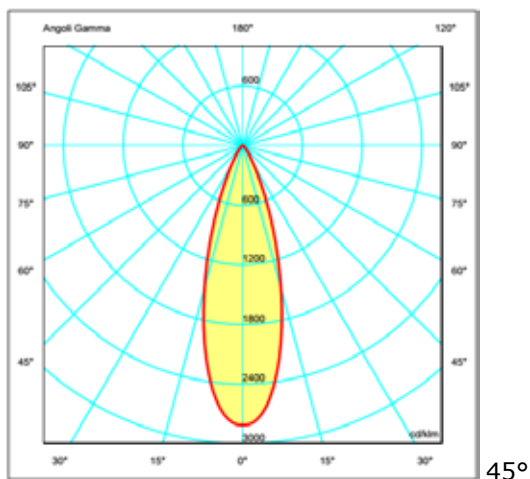

GENERAL INFORMATIONS:

Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must to be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.


ATLAS RGB DATA-SHEET

ACCESSORIES:


ACC.0023.0
regulation knob




ACC.0043.0
universal ground
picket size 1

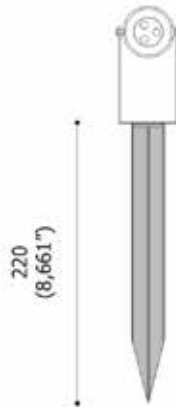


ACC.0044.0
universal ground
picket size 2

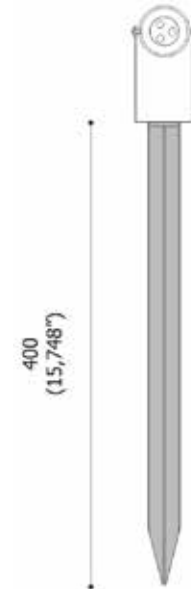

ACC.0045.0
anodized aluminium
asymmetric glare cowl

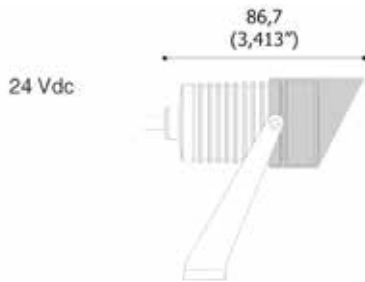

ACC.0155.0 *
stainless steel asymmetric
glare cowl

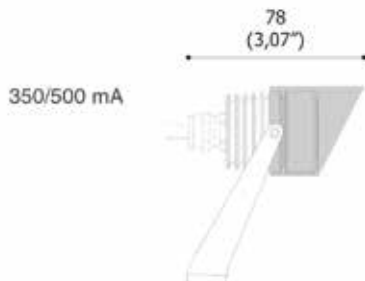

* special on request

Product code	Code	Release date	Product	Power	Supply	CCT	Optics	lux (lm) *tj=25 **	Fixture Flux (lm)
ATL.02.H27A1.0	ATL.02.H27XX.0	18/12	Atlas	2W	24V	2700 K	Honeycomb	153,75**	105,27
ATL.02.H27S1.0	ATL.02.H27XX.0	18/12	Atlas	2W	24V	2700 K	Honeycomb	153,75**	105,27
ATL.02.H30A1.0	ATL.02.H30XX.0	18/12	Atlas	2W	24V	3000 K	Honeycomb	161,25**	107,97
ATL.02.H30S1.0	ATL.02.H30XX.0	18/12	Atlas	2W	24V	3000 K	Honeycomb	161,25**	107,97
ATL.02.H40A1.0	ATL.02.H40XX.0	18/12	Atlas	2W	24V	4000 K	Honeycomb	176,25**	112,07
ATL.02.H40S1.0	ATL.02.H40XX.0	18/12	Atlas	2W	24V	4000 K	Honeycomb	176,25**	112,07
ATL.01.F27A1.0	ATL.01.F27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Lens 24°	114,80**	94,80
ATL.01.F27S1.0	ATL.01.F27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Lens 24°	114,80**	94,80
ATL.01.F27A1.0	ATL.01.F27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Lens 24°	153,75**	130,29
ATL.01.F27S1.0	ATL.01.F27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Lens 24°	153,75**	130,29
ATL.01.F30A1.0	ATL.01.F30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Lens 24°	120,40**	97,24
ATL.01.F30S1.0	ATL.01.F30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Lens 24°	120,40**	97,24
ATL.01.F30A1.0	ATL.01.F30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Lens 24°	161,25**	133,64
ATL.01.F30S1.0	ATL.01.F30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Lens 24°	161,25**	133,64
ATL.01.F40A1.0	ATL.01.F40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Lens 24°	131,60**	100,93
ATL.01.F40S1.0	ATL.01.F40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Lens 24°	131,60**	100,93
ATL.01.F40A1.0	ATL.01.F40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Lens 24°	176,25**	138,71
ATL.01.F40S1.0	ATL.01.F40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Lens 24°	176,25**	138,71
ATL.02.F27A1.0	ATL.02.F27XX.0	18/12	Atlas	2W	24V	2700 K	Lens 24°	153,75**	130,29
ATL.02.F27S1.0	ATL.02.F27XX.0	18/12	Atlas	2W	24V	2700 K	Lens 24°	153,75**	130,29
ATL.02.F30A1.0	ATL.02.F30XX.0	18/12	Atlas	2W	24V	3000 K	Lens 24°	161,25**	133,64
ATL.02.F30S1.0	ATL.02.F30XX.0	18/12	Atlas	2W	24V	3000 K	Lens 24°	161,25**	133,64
ATL.02.F40A1.0	ATL.02.F40XX.0	18/12	Atlas	2W	24V	4000 K	Lens 24°	176,25**	138,71
ATL.02.F40S1.0	ATL.02.F40XX.0	18/12	Atlas	2W	24V	4000 K	Lens 24°	176,25**	138,71
ATL.03.F27A1.0	ATL.03.F27XX.0 350mA	18/12	Atlas	4W	350 mA	2700 K	Lens 24°	475,00**	304,84
ATL.03.F27S1.0	ATL.03.F27XX.0 350mA	18/12	Atlas	4W	350 mA	2700 K	Lens 24°	475,00**	304,84
ATL.03.F27A1.0	ATL.03.F27XX.0 500mA	18/12	Atlas	6W	500 mA	2700 K	Lens 24°	641,25**	346,34
ATL.03.F27S1.0	ATL.03.F27XX.0 500mA	18/12	Atlas	6W	500 mA	2700 K	Lens 24°	641,25**	346,34
ATL.03.F30A1.0	ATL.03.F30XX.0 350mA	18/12	Atlas	4W	350 mA	3000 K	Lens 24°	510,00**	352,95
ATL.03.F30S1.0	ATL.03.F30XX.0 350mA	18/12	Atlas	4W	350 mA	3000 K	Lens 24°	510,00**	352,95
ATL.03.F30A1.0	ATL.03.F30XX.0 500mA	18/12	Atlas	6W	500 mA	3000 K	Lens 24°	688,50**	400,99
ATL.03.F30S1.0	ATL.03.F30XX.0 500mA	18/12	Atlas	6W	500 mA	3000 K	Lens 24°	688,50**	400,99
ATL.03.F40A1.0	ATL.03.F40XX.0 350mA	18/12	Atlas	4W	350 mA	4000 K	Lens 24°	550,00**	380,62
ATL.03.F40S1.0	ATL.03.F40XX.0 350mA	18/12	Atlas	4W	350 mA	4000 K	Lens 24°	550,00**	380,62
ATL.03.F40A1.0	ATL.03.F40XX.0 500mA	18/12	Atlas	6W	500 mA	4000 K	Lens 24°	742,50**	432,43
ATL.03.F40S1.0	ATL.03.F40XX.0 500mA	18/12	Atlas	6W	500 mA	4000 K	Lens 24°	742,50**	432,43
ATL.04.F27A1.0	ATL.04.F27XX.0 500mA	18/12	Atlas	6,7W	24V	2700 K	Lens 24°	641,25**	346,34
ATL.04.F27S1.0	ATL.04.F27XX.0 500mA	18/12	Atlas	6,7W	24V	2700 K	Lens 24°	641,25**	346,34
ATL.04.F30A1.0	ATL.04.F30XX.0 500mA	18/12	Atlas	6,7W	24V	3000 K	Lens 24°	688,50**	400,99
ATL.04.F30S1.0	ATL.04.F30XX.0 500mA	18/12	Atlas	6,7W	24V	3000 K	Lens 24°	688,50**	400,99
ATL.04.F40A1.0	ATL.04.F40XX.0 500mA	18/12	Atlas	6,7W	24V	4000 K	Lens 24°	742,50**	432,43
ATL.04.F40S1.0	ATL.04.F40XX.0 500mA	18/12	Atlas	6,7W	24V	4000 K	Lens 24°	742,50**	432,43
ATL.01.W27A1.0	ATL.01.W27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Lens 43°	114,80**	95,72
ATL.01.W27S1.0	ATL.01.W27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Lens 43°	114,80**	95,72
ATL.01.W27A1.0	ATL.01.W27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Lens 43°	153,75**	131,56
ATL.01.W27S1.0	ATL.01.W27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Lens 43°	153,75**	131,56
ATL.01.W30A1.0	ATL.01.W30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Lens 43°	120,40**	98,19
ATL.01.W30S1.0	ATL.01.W30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Lens 43°	120,40**	98,19
ATL.01.W30A1.0	ATL.01.W30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Lens 43°	161,25**	134,95
ATL.01.W30S1.0	ATL.01.W30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Lens 43°	161,25**	134,95
ATL.01.W40A1.0	ATL.01.W40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Lens 43°	131,60**	101,91
ATL.01.W40S1.0	ATL.01.W40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Lens 43°	131,60**	101,91
ATL.01.W40A1.0	ATL.01.W40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Lens 43°	176,25**	140,07
ATL.01.W40S1.0	ATL.01.W40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Lens 43°	176,25**	140,07
ATL.02.W27A1.0	ATL.02.W27XX.0	18/12	Atlas	2W	24V	2700 K	Lens 43°	153,75**	131,56
ATL.02.W27S1.0	ATL.02.W27XX.0	18/12	Atlas	2W	24V	2700 K	Lens 43°	153,75**	131,56
ATL.02.W30A1.0	ATL.02.W30XX.0	18/12	Atlas	2W	24V	3000 K	Lens 43°	161,25**	134,95
ATL.02.W30S1.0	ATL.02.W30XX.0	18/12	Atlas	2W	24V	3000 K	Lens 43°	161,25**	134,95
ATL.02.W40A1.0	ATL.02.W40XX.0	18/12	Atlas	2W	24V	4000 K	Lens 43°	176,25**	140,07
ATL.02.W40S1.0	ATL.02.W40XX.0	18/12	Atlas	2W	24V	4000 K	Lens 43°	176,25**	140,07
ATL.02.W90A1.0	ATL.02.W90XX.0	18/12	Atlas	4W	24V	RGB	Lens 45°	105,00*	53,19
ATL.02.W90S1.0	ATL.02.W90XX.0	18/12	Atlas	4W	24V	RGB	Lens 45°	105,00*	53,19
ATL.02.W90A1.0	ATL.02.W90XX.0 R	18/12	Atlas	1W	24V	RGB (Rosso)	Lens 45°	35,00*	19,04
ATL.02.W90S1.0	ATL.02.W90XX.0 R	18/12	Atlas	1W	24V	RGB (Rosso)	Lens 45°	35,00*	19,04
ATL.02.W90A1.0	ATL.02.W90XX.0 G	18/12	Atlas	1W	24V	RGB (Verde)	Lens 45°	57,00*	39,08
ATL.02.W90S1.0	ATL.02.W90XX.0 G	18/12	Atlas	1W	24V	RGB (Verde)	Lens 45°	57,00*	39,08
ATL.02.W90A1.0	ATL.02.W90XX.0 B	18/12	Atlas	1W	24V	RGB (Blu)	Lens 45°	13,00*	7,17
ATL.02.W90S1.0	ATL.02.W90XX.0 B	18/12	Atlas	1W	24V	RGB (Blu)	Lens 45°	13,00*	7,17
ATL.03.W27A1.0	ATL.03.W27XX.0 350mA	18/12	Atlas	4W	350 mA	2700 K	Lens 48°	475,00**	327,05
ATL.03.W27S1.0	ATL.03.W27XX.0 350mA	18/12	Atlas	4W	350 mA	2700 K	Lens 48°	475,00**	327,05
ATL.03.W27A1.0	ATL.03.W27XX.0 500mA	18/12	Atlas	6W	500 mA	2700 K	Lens 48°	641,25**	361,66
ATL.03.W27S1.0	ATL.03.W27XX.0 500mA	18/12	Atlas	6W	500 mA	2700 K	Lens 48°	641,25**	361,66
ATL.03.W30A1.0	ATL.03.W30XX.0 350mA	18/12	Atlas	4W	350 mA	3000 K	Lens 48°	510,00**	378,66
ATL.03.W30S1.0	ATL.03.W30XX.0 350mA	18/12	Atlas	4W	350 mA	3000 K	Lens 48°	510,00**	378,66
ATL.03.W30A1.0	ATL.03.W30XX.0 500mA	18/12	Atlas	6W	500 mA	3000 K	Lens 48°	688,50**	418,73
ATL.03.W30S1.0	ATL.03.W30XX.0 500mA	18/12	Atlas	6W	500 mA	3000 K	Lens 48°	688,50**	418,73
ATL.03.W40A1.0	ATL.03.W40XX.0 350mA	18/12	Atlas	4W	350 mA	4000 K	Lens 48°	550,00**	408,35
ATL.03.W40S1.0	ATL.03.W40XX.0 350mA	18/12	Atlas	4W	350 mA	4000 K	Lens 48°	550,00**	408,35
ATL.03.W40A1.0	ATL.03.W40XX.0 500mA	18/12	Atlas	6W	500 mA	4000 K	Lens 48°	742,50**	451,56
ATL.03.W40S1.0	ATL.03.W40XX.0 500mA	18/12	Atlas	6W	500 mA	4000 K	Lens 48°	742,50**	451,56
ATL.04.W27A1.0	ATL.04.W27XX.0 500mA	18/12	Atlas	6,7W	24V	2700 K	Lens 48°	641,25**	361,66
ATL.04.W27S1.0	ATL.04.W27XX.0 500mA	18/12	Atlas	6,7W	24V	2700 K	Lens 48°	641,25**	361,66
ATL.04.W30A1.0	ATL.04.W30XX.0 500mA	18/12	Atlas	6,7W	24V	3000 K	Lens 48°	688,50**	418,73

Product code	Code	Release date	Product	Power	Supply	CCT	Optics	lux (lm) *tj=25 **	Fixture Flux (lm)
ATL.04.W30S1.0	ATL.04.W30XX.0 500mA	18/12	Atlas	6,7W	24V	3000 K	Lens 48°	688,50**	418,73
ATL.04.W40A1.0	ATL.04.W40XX.0 500mA	18/12	Atlas	6,7W	24V	4000 K	Lens 48°	742,50**	451,56
ATL.04.W40S1.0	ATL.04.W40XX.0 500mA	18/12	Atlas	6,7W	24V	4000 K	Lens 48°	742,50**	451,56
ATL.01.M27A1.0	ATL.01.M27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Lens 9°	114,80**	99,09
ATL.01.M27S1.0	ATL.01.M27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Lens 9°	114,80**	99,09
ATL.01.M27A1.0	ATL.01.M27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Lens 9°	153,75**	136,19
ATL.01.M27S1.0	ATL.01.M27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Lens 9°	153,75**	136,19
ATL.01.M30A1.0	ATL.01.M30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Lens 9°	120,40**	101,64
ATL.01.M30S1.0	ATL.01.M30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Lens 9°	120,40**	101,64
ATL.01.M30A1.0	ATL.01.M30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Lens 9°	161,25**	139,69
ATL.01.M30S1.0	ATL.01.M30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Lens 9°	161,25**	139,69
ATL.01.M40A1.0	ATL.01.M40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Lens 9°	131,60**	105,49
ATL.01.M40S1.0	ATL.01.M40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Lens 9°	131,60**	105,49
ATL.01.M40A1.0	ATL.01.M40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Lens 9°	176,25**	144,99
ATL.01.M40S1.0	ATL.01.M40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Lens 9°	176,25**	144,99
ATL.02.M27A1.0	ATL.02.M27XX.0	18/12	Atlas	2W	24V	2700 K	Lens 9°	153,75**	136,19
ATL.02.M27S1.0	ATL.02.M27XX.0	18/12	Atlas	2W	24V	2700 K	Lens 9°	153,75**	136,19
ATL.02.M30A1.0	ATL.02.M30XX.0	18/12	Atlas	2W	24V	3000 K	Lens 9°	161,25**	139,69
ATL.02.M30S1.0	ATL.02.M30XX.0	18/12	Atlas	2W	24V	3000 K	Lens 9°	161,25**	139,69
ATL.02.M40A1.0	ATL.02.M40XX.0	18/12	Atlas	2W	24V	4000 K	Lens 9°	176,25**	144,99
ATL.02.M40S1.0	ATL.02.M40XX.0	18/12	Atlas	2W	24V	4000 K	Lens 9°	176,25**	144,99
ATL.01.S27A1.0	ATL.01.S27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Satin Glass	114,80**	72,20
ATL.01.S27S1.0	ATL.01.S27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Satin Glass	114,80**	72,20
ATL.01.S27A1.0	ATL.01.S27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Satin Glass	153,75**	99,23
ATL.01.S27S1.0	ATL.01.S27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Satin Glass	153,75**	99,23
ATL.01.S30A1.0	ATL.01.S30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Satin Glass	120,40**	74,09
ATL.01.S30S1.0	ATL.01.S30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Satin Glass	120,40**	74,09
ATL.01.S30A1.0	ATL.01.S30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Satin Glass	161,25**	101,83
ATL.01.S30S1.0	ATL.01.S30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Satin Glass	161,25**	101,83
ATL.01.S40A1.0	ATL.01.S40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Satin Glass	131,60**	76,95
ATL.01.S40S1.0	ATL.01.S40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Satin Glass	131,60**	76,95
ATL.01.S40A1.0	ATL.01.S40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Satin Glass	176,25**	105,76
ATL.01.S40S1.0	ATL.01.S40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Satin Glass	176,25**	105,76
ATL.02.S27A1.0	ATL.02.S27XX.0	18/12	Atlas	2W	24V	2700 K	Satin Glass	153,75**	99,23
ATL.02.S27S1.0	ATL.02.S27XX.0	18/12	Atlas	2W	24V	2700 K	Satin Glass	153,75**	99,23
ATL.02.S30A1.0	ATL.02.S30XX.0	18/12	Atlas	2W	24V	3000 K	Satin Glass	161,25**	101,83
ATL.02.S30S1.0	ATL.02.S30XX.0	18/12	Atlas	2W	24V	3000 K	Satin Glass	161,25**	101,83
ATL.02.S40A1.0	ATL.02.S40XX.0	18/12	Atlas	2W	24V	4000 K	Satin Glass	176,25**	105,76
ATL.02.S40S1.0	ATL.02.S40XX.0	18/12	Atlas	2W	24V	4000 K	Satin Glass	176,25**	105,76
ATL.03.S27A1.0	ATL.03.S27XX.0 350mA	18/12	Atlas	4W	350 mA	2700 K	Satin Glass	475,00**	249,40
ATL.03.S27S1.0	ATL.03.S27XX.0 350mA	18/12	Atlas	4W	350 mA	2700 K	Satin Glass	475,00**	249,40
ATL.03.S27A1.0	ATL.03.S27XX.0 500mA	18/12	Atlas	6W	500 mA	2700 K	Satin Glass	641,25**	274,49
ATL.03.S27S1.0	ATL.03.S27XX.0 500mA	18/12	Atlas	6W	500 mA	2700 K	Satin Glass	641,25**	274,49
ATL.03.S30A1.0	ATL.03.S30XX.0 350mA	18/12	Atlas	4W	350 mA	3000 K	Satin Glass	510,00**	288,76
ATL.03.S30S1.0	ATL.03.S30XX.0 350mA	18/12	Atlas	4W	350 mA	3000 K	Satin Glass	510,00**	288,76
ATL.03.S30A1.0	ATL.03.S30XX.0 500mA	18/12	Atlas	6W	500 mA	3000 K	Satin Glass	688,50**	217,80
ATL.03.S30S1.0	ATL.03.S30XX.0 500mA	18/12	Atlas	6W	500 mA	3000 K	Satin Glass	688,50**	217,80
ATL.03.S40A1.0	ATL.03.S40XX.0 350mA	18/12	Atlas	4W	350 mA	4000 K	Satin Glass	550,00**	311,40
ATL.03.S40S1.0	ATL.03.S40XX.0 350mA	18/12	Atlas	4W	350 mA	4000 K	Satin Glass	550,00**	311,40
ATL.03.S40A1.0	ATL.03.S40XX.0 500mA	18/12	Atlas	6W	500 mA	4000 K	Satin Glass	742,50**	342,72
ATL.03.S40S1.0	ATL.03.S40XX.0 500mA	18/12	Atlas	6W	500 mA	4000 K	Satin Glass	742,50**	342,72
ATL.04.S27A1.0	ATL.04.S27XX.0 500mA	18/12	Atlas	6,7W	24V	2700 K	Satin Glass	641,25**	274,49
ATL.04.S27S1.0	ATL.04.S27XX.0 500mA	18/12	Atlas	6,7W	24V	2700 K	Satin Glass	641,25**	274,49
ATL.04.S30A1.0	ATL.04.S30XX.0 500mA	18/12	Atlas	6,7W	24V	3000 K	Satin Glass	688,50**	217,80
ATL.04.S30S1.0	ATL.04.S30XX.0 500mA	18/12	Atlas	6,7W	24V	3000 K	Satin Glass	688,50**	217,80
ATL.04.S40A1.0	ATL.04.S40XX.0 500mA	18/12	Atlas	6,7W	24V	4000 K	Satin Glass	742,50**	342,72
ATL.04.S40S1.0	ATL.04.S40XX.0 500mA	18/12	Atlas	6,7W	24V	4000 K	Satin Glass	742,50**	342,72
ATL.01.T27A1.0	ATL.01.T27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Trasparent Glass	114,80**	85,03
ATL.01.T27S1.0	ATL.01.T27XX.0 350mA	18/12	Atlas	1W	350 mA	2700 K	Trasparent Glass	114,80**	85,03
ATL.01.T27A1.0	ATL.01.T27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Trasparent Glass	153,75**	116,87
ATL.01.T27S1.0	ATL.01.T27XX.0 500mA	18/12	Atlas	1,5W	500 mA	2700 K	Trasparent Glass	153,75**	116,87
ATL.01.T30A1.0	ATL.01.T30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Trasparent Glass	120,40**	87,26
ATL.01.T30S1.0	ATL.01.T30XX.0 350mA	18/12	Atlas	1W	350 mA	3000 K	Trasparent Glass	120,40**	87,26
ATL.01.T30A1.0	ATL.01.T30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Trasparent Glass	161,25**	119,93
ATL.01.T30S1.0	ATL.01.T30XX.0 500mA	18/12	Atlas	1,5W	500 mA	3000 K	Trasparent Glass	161,25**	119,93
ATL.01.T40A1.0	ATL.01.T40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Trasparent Glass	131,60**	90,63
ATL.01.T40S1.0	ATL.01.T40XX.0 350mA	18/12	Atlas	1W	350 mA	4000 K	Trasparent Glass	131,60**	90,63
ATL.01.T40A1.0	ATL.01.T40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Trasparent Glass	176,25**	124,56
ATL.01.T40S1.0	ATL.01.T40XX.0 500mA	18/12	Atlas	1,5W	500 mA	4000 K	Trasparent Glass	176,25**	124,56
ATL.02.T27A1.0	ATL.02.T27XX.0	18/12	Atlas	2W	24V	2700 K	Trasparent Glass	153,75**	116,87
ATL.02.T27S1.0	ATL.02.T27XX.0	18/12	Atlas	2W	24V	2700 K	Trasparent Glass	153,75**	116,87
ATL.02.T30A1.0	ATL.02.T30XX.0	18/12	Atlas	2W	24V	3000 K	Trasparent Glass	161,25**	119,93
ATL.02.T30S1.0	ATL.02.T30XX.0	18/12	Atlas	2W	24V	3000 K	Trasparent Glass	161,25**	119,93
ATL.02.T40A1.0	ATL.02.T40XX.0	18/12	Atlas	2W	24V	4000 K	Trasparent Glass	176,25**	124,56
ATL.02.T40S1.0	ATL.02.T40XX.0	18/12	Atlas	2W	24V	4000 K	Trasparent Glass	176,25**	124,56
ATL.02.T90A1.0	ATL.02.T90XX.0	18/12	Atlas	4W	24V	RGB	Trasparent Glass	105,00*	53,48
ATL.02.T90S1.0	ATL.02.T90XX.0	18/12	Atlas	4W	24V	RGB	Trasparent Glass	105,00*	53,48
ATL.02.T90A1.0	ATL.02.T90XX.0 R	18/12	Atlas	1W	24V	RGB (Rosso)	Trasparent Glass	35,00*	19,58
ATL.02.T90S1.0	ATL.02.T90XX.0 R	18/12	Atlas	1W	24V	RGB (Rosso)	Trasparent Glass	35,00*	19,58
ATL.02.T90A1.0	ATL.02.T90XX.0 G	18/12	Atlas	1W	24V	RGB (Verde)	Trasparent Glass	57,00*	40,19
ATL.02.T90S1.0	ATL.02.T90XX.0 G	18/12	Atlas	1W	24V	RGB (Verde)	Trasparent Glass	57,00*	40,19
ATL.02.T90A1.0	ATL.02.T90XX.0 B	18/12	Atlas	1W	24V	RGB (Blu)	Trasparent Glass	13,00*	7,37
ATL.02.T90S1.0	ATL.02.T90XX.0 B	18/12	Atlas	1W	24V	RGB (Blu)	Trasparent Glass	13,00*	7,37