


ATON Monochromatic DATA-SHEET

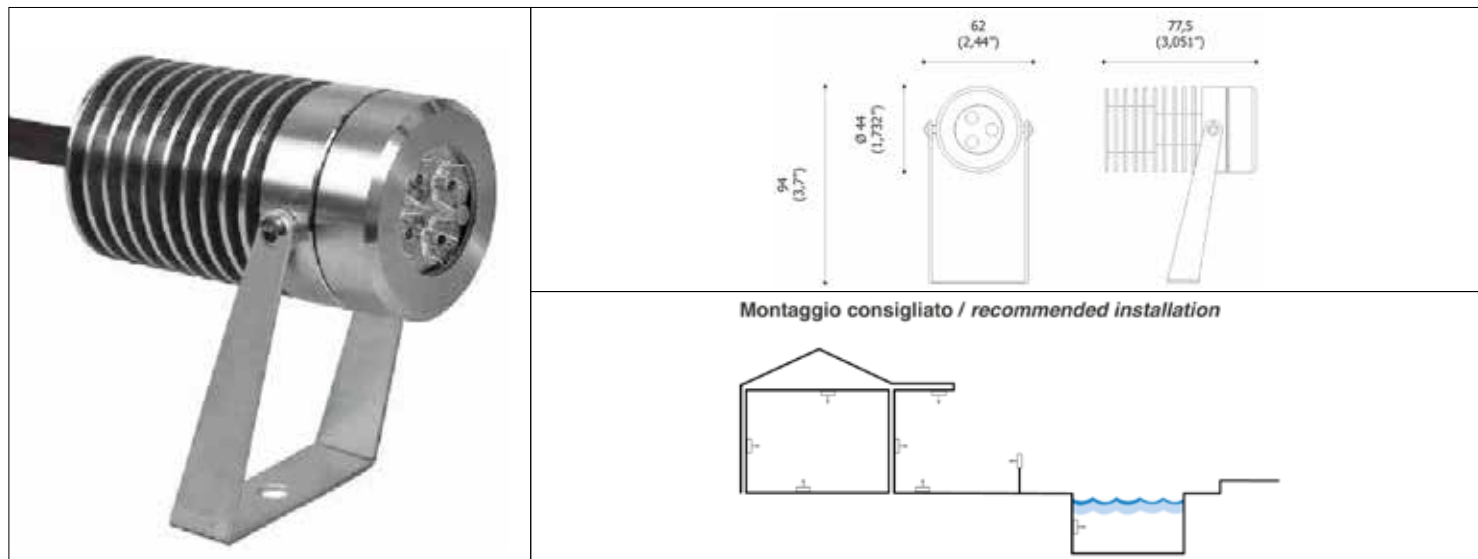

PRODUCT DESCRIPTION:

Professional compact projector for direct and indirect lighting suitable for indoor, outdoor and underwater settings.

Body finished anodized aluminium or satin stainless steel. All the materials are suitable for use in swimming pools*, fountains and with salt water. UV resistance of all materials.

(*not for USA and Canada)

TECHNICALS FEATURES:

Materials	Stainless steel AISI 316L or ANTICORODAL aluminium alloy
Body Finishes	Satin stainless steel AISI 316L or anodized aluminium
Front Finishes	Satin stainless steel AISI 316L or anodized aluminium
Power Supply	350/500 mA constant current - 24 Vdc constant voltage
Power	3 LED: 3/4,5 W (350/500 mA) ; 5 W (24 Vdc) 4 LED: 4/6 W (350/500 mA) ; 7 W (24 Vdc)
Light Source	Power LED LM 80 COMPLIANT
Color Temperature	2700 K ; 3000 K ; 4000 K
Ra	> 80
Chromatic Selection	Mac-Adam 2-step
Lifetime	> 50000 h (TM21 L80 B10 @50000h)
Optics	Narrow beam 10° ; medium beam 25° ; wide beam 35° ; transparent diffuser 65° ; satin diffuser 67°
Tc metal body	< 90 °C (194 °F)
Ta operating temperature	- 30 ÷ 50 °C (-22 ÷ 122 °F)
Functions	On/Off ; dimmable
Cable	350/500 mA: AWM STYLE 20233 2x0,75 mm ² (AWG18) Red,Black Ø 5,2 mm (0,204") L.1m (3,28 ft). 24 Vdc: AWM style 20233 2x0,75 mm ² (AWG18) Red;Black + 1x0,5mm ² (AWG20) Violet Ø 6 mm (0,236") L. 1 m (3,28 ft).
Weigth	350/500 mA: aluminium 203 g. (7,196 oz) , stainless steel 490 g. (17,28 oz) 24 Vdc: aluminium 243 g. (8,57 oz) , stainless steel 530 g. (18,69 oz)
Installations	Surface mounted (wall,floor,ceiling,picket) - immersion (only stainless steel version)
Norms	60598-1 ; 60598-2 and its parts ; UL 676 ; CSA C22.2 No. 89-15 ; UL 2108 ; UL 1598/C250.-08



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power.

Photometric data available at www.aldabra.it

Specifications are subject to change without notice.

www.aldabra.it

ATON Monochromatic DATA-SHEET

GENERAL FEATURES:

	LED number	power @350 mA*	power @500 mA*	power @24 Vdc*
ATO.01.XXXXX.X	3	3 W	4,5 W	
ATO.02.XXXXX.X	4	4 W	6 W	
ATO.03.XXXXX.X	3			5 W
ATO.04.XXXXX.X	4			7 W

* Stainless steel version to be used only in permanent immersion

OPTICAL FEATURES:

ATO.XX.MXXXX.X	Narrow beam 10°
ATO.XX.FXXXX.X	Medium beam 25°
ATO.XX.WXXXX.X	Wide beam 35°
ATO.XX.TXXXX.X	Transparent diffuser 65°
ATO.XX.SXXXX.X	Satin diffuser 67°


LIGHT FEATURES:

	Power LED	lm* (350mA@ 4LED)	lm* (500mA/ 24Vdc@4LED)	Ra	Chromatic selection
ATO.XX.X 27 XX.X	2700K warm white	290	391	>80	MacAdam 2-step
ATO.XX.X 30 XX.X	3000K warm white	306	414	>80	MacAdam 2-step
ATO.XX.X 40 XX.X	4000K neutral white	337	454	>80	MacAdam 2-step


*delivered luminous flux (narrow beam)

FINISHES FEATURES:


ATO.XX.XXX A1 .X	Aluminium anodized
ATO.XX.XXX S1 .X	Satin stainless steel




narrow beam 10°




medium beam 25°



wide beam 35°



transparent diffuser 65°



satin diffuser 67°

GENERAL INFORMATIONS:

Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

ATON Monochromatic


DATA-SHEET

ACCESSORIES:


ACC.0026.0
regulation knob




ACC.0043.0
universal ground
picket size 1

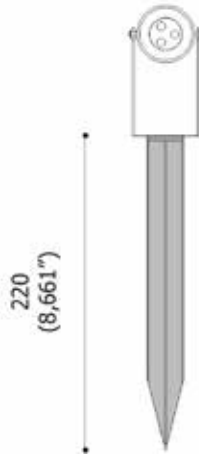

ACC.0044.0
universal ground
picket size 2

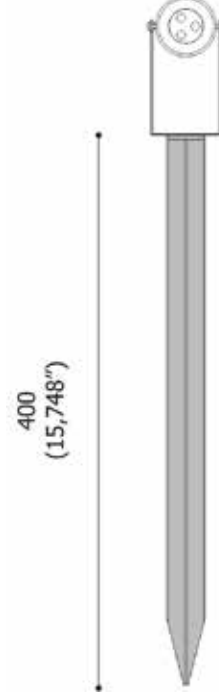


ACC.0045.0
anodized aluminium
asymmetric glare cowl

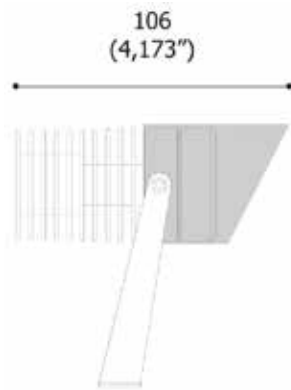

ACC.0154.0 *
stainless steel asymmetric
glare cowl

* special on request

ATON RGB DATA-SHEET

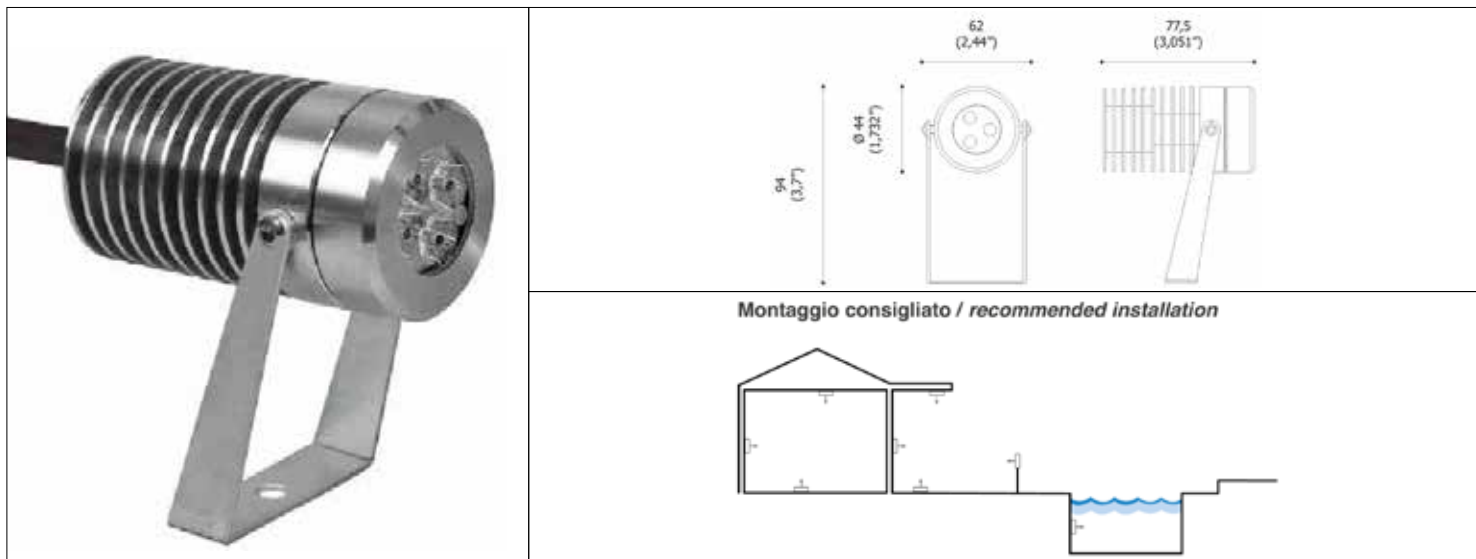

PRODUCT DESCRIPTION:

Professional compact projector for direct and indirect lighting suitable for indoor, outdoor and underwater settings. Body finished anodized aluminium or satin stainless steel. All the materials are suitable for use in swimming pools*, fountains and with salt water. UV resistance of all materials. (*not for USA and Canada)

TECHNICALS FEATURES:

Materials	Stainless steel AISI 316L or ANTICORODAL aluminium alloy
Body Finishes	Satin stainless steel AISI 316L or anodized aluminium
Front Finishes	Satin stainless steel AISI 316L or anodized aluminium
Power Supply	24 Vdc constant voltage
Power	4 W
Light Source	Power LED LM 80 COMPLIANT
Dominant Wavelength	R=622nm, G=530nm, B=470nm
Lifetime	> 50000 h (TM21 L80 B10 @50000h)
Optics	wide beam 45° ; transparent difuser 65° ; satin diffuser 67°
Tc metal body	< 90 °C (194 °F)
Ta operating temperature	- 30 ÷ 50 °C (-22 ÷ 122 °F)
Functions	On/Off ; dimmable
Cable	AWM style 20233 2x0,75mm ² (AWG18) Red;Black+3x0,5mm ² (AWG20) (Red/black, Green/black, Blue/black) Ø 6,5 mm (0,255") L. 1m (3,28 ft).
Weigth	Aluminium 243 g. (8,57 oz) , stainless steel 530 g. (18,69 oz)
Installations	Surface mounted (wall,floor,ceiling,picket) - immersion (only stainless steel version)
Norms	60598-1 ; 60598-2 and its parts ; UL 676 ; CSA C22.2 No. 89-15 ; UL 2108 ; UL 1598/C250.-08



AGALEX STOP Only for constant current versions

IP66 Aluminium version

NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power. Photometric data available at www.aldabra.it

ATON RGB DATA-SHEET

GENERAL FEATURES:

power @ 24Vdc*

ATO.01.XXXXX.X	4 W
-----------------------	-----

* Stainless steel version to be used only in permanent immersion

OPTICAL FEATURES:

ATO.XX.WXXXX.X	Wide beam 45°
-----------------------	---------------

ATO.XX.TXXXX.X	Transparent diffuser 65°
-----------------------	--------------------------

ATO.XX.SXXXX.X	Satin diffuser 67°
-----------------------	--------------------

LIGHT FEATURES:

Power LED	lm*
-----------	-----


ATO.XX.X90XX.X	R, G, B	58
----------------	---------	----

*delivered luminous flux (wide beam)


FINISHES FEATURES:

ATO.XX.XXXA1.X	Aluminium anodized
----------------	--------------------


ATO.XX.XXXS1.X	Satin stainless steel
----------------	-----------------------



wide beam 45°



transparent diffuser 65°



satin diffuser 67°

GENERAL INFORMATIONS:

Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.


ATON RGB DATA-SHEET

ACCESSORIES:


ACC.0026.0
regulation knob




ACC.0043.0
universal ground
picket size 1

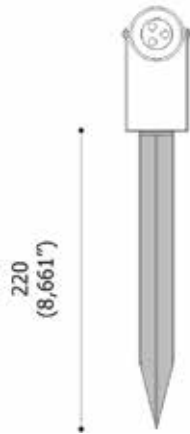

ACC.0044.0
universal ground
picket size 2

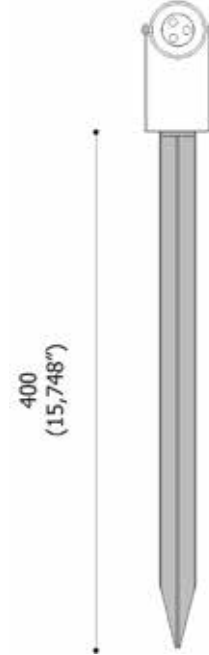

ACC.0045.0
anodized aluminium
asymmetric glare cowl

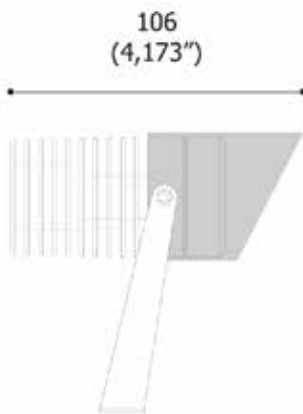

ACC.0154.0 *
stainless steel asymmetric
glare cowl

* special on request

Product code	Code	Release date	Product	Power	Supply	CCT	Optics	lux (lm) *tj=25 **t	Fixture Flux (lm)
ATO.01.M27A1.0	ATO.01.M27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Lens 10°	310,80**	219,29
ATO.01.M27S1.0	ATO.01.M27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Lens 10°	310,80**	219,29
ATO.01.M30A1.0	ATO.01.M30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Lens 10°	327,60**	231,14
ATO.01.M30S1.0	ATO.01.M30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Lens 10°	327,60**	231,14
ATO.01.M40A1.0	ATO.01.M40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Lens 10°	361,20**	254,84
ATO.01.M40S1.0	ATO.01.M40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Lens 10°	361,20**	254,84
ATO.01.M27A1.0	ATO.01.M27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Lens 10°	416,25**	294,86
ATO.01.M27S1.0	ATO.01.M27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Lens 10°	416,25**	294,86
ATO.01.M30A1.0	ATO.01.M30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Lens 10°	438,75**	310,79
ATO.01.M30S1.0	ATO.01.M30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Lens 10°	438,75**	310,79
ATO.01.M40A1.0	ATO.01.M40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Lens 10°	483,75**	342,66
ATO.01.M40S1.0	ATO.01.M40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Lens 10°	483,75**	342,66
ATO.03.M27A1.0	ATO.03.M27XX.0	21/5	Aton 3x	5W	24V	2700 K	Lens 10°	416,25**	294,86
ATO.03.M27S1.0	ATO.03.M27XX.0	21/5	Aton 3x	5W	24V	2700 K	Lens 10°	416,25**	294,86
ATO.03.M30A1.0	ATO.03.M30XX.0	21/5	Aton 3x	5W	24V	3000 K	Lens 10°	438,75**	310,79
ATO.03.M30S1.0	ATO.03.M30XX.0	21/5	Aton 3x	5W	24V	3000 K	Lens 10°	438,75**	310,79
ATO.03.M40A1.0	ATO.03.M40XX.0	21/5	Aton 3x	5W	24V	4000 K	Lens 10°	483,75**	342,66
ATO.03.M40S1.0	ATO.03.M40XX.0	21/5	Aton 3x	5W	24V	4000 K	Lens 10°	483,75**	342,66
ATO.02.M27A1.0	ATO.02.M27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Lens 10°	414,40**	289,59
ATO.02.M27S1.0	ATO.02.M27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Lens 10°	414,40**	289,59
ATO.02.M30A1.0	ATO.02.M30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Lens 10°	436,80**	305,23
ATO.02.M30S1.0	ATO.02.M30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Lens 10°	436,80**	305,23
ATO.02.M40A1.0	ATO.02.M40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Lens 10°	481,60**	336,50
ATO.02.M40S1.0	ATO.02.M40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Lens 10°	481,60**	336,50
ATO.02.M27A1.0	ATO.02.M27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Lens 10°	555,00**	390,40
ATO.02.M27S1.0	ATO.02.M27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Lens 10°	555,00**	390,40
ATO.02.M30A1.0	ATO.02.M30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Lens 10°	585,00**	413,46
ATO.02.M30S1.0	ATO.02.M30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Lens 10°	585,00**	413,46
ATO.02.M40A1.0	ATO.02.M40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Lens 10°	645,00**	453,64
ATO.02.M40S1.0	ATO.02.M40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Lens 10°	645,00**	453,64
ATO.04.M27A1.0	ATO.04.M27XX.0	21/5	Aton 4x	7W	24V	2700 K	Lens 10°	555,00**	390,40
ATO.04.M27S1.0	ATO.04.M27XX.0	21/5	Aton 4x	7W	24V	2700 K	Lens 10°	555,00**	390,40
ATO.04.M30A1.0	ATO.04.M30XX.0	21/5	Aton 4x	7W	24V	3000 K	Lens 10°	585,00**	413,46
ATO.04.M30S1.0	ATO.04.M30XX.0	21/5	Aton 4x	7W	24V	3000 K	Lens 10°	585,00**	413,46
ATO.04.M40A1.0	ATO.04.M40XX.0	21/5	Aton 4x	7W	24V	4000 K	Lens 10°	645,00**	453,64
ATO.04.M40S1.0	ATO.04.M40XX.0	21/5	Aton 4x	7W	24V	4000 K	Lens 10°	645,00**	453,64
ATO.01.F27A1.0	ATO.01.F27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Lens 25°	344,40**	213,08
ATO.01.F27S1.0	ATO.01.F27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Lens 25°	344,40**	213,08
ATO.01.F30A1.0	ATO.01.F30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Lens 25°	361,20**	223,35
ATO.01.F30S1.0	ATO.01.F30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Lens 25°	361,20**	223,35
ATO.01.F40A1.0	ATO.01.F40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Lens 25°	394,80**	244,12
ATO.01.F40S1.0	ATO.01.F40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Lens 25°	394,80**	244,12
ATO.01.F27A1.0	ATO.01.F27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Lens 25°	416,25**	286,50
ATO.01.F27S1.0	ATO.01.F27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Lens 25°	416,25**	286,50
ATO.01.F30A1.0	ATO.01.F30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Lens 25°	438,75**	300,32
ATO.01.F30S1.0	ATO.01.F30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Lens 25°	438,75**	300,32
ATO.01.F40A1.0	ATO.01.F40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Lens 25°	483,75**	328,25
ATO.01.F40S1.0	ATO.01.F40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Lens 25°	483,75**	328,25
ATO.03.F27A1.0	ATO.03.F27XX.0	21/5	Aton 3x	5W	24V	2700 K	Lens 25°	416,25**	286,50
ATO.03.F27S1.0	ATO.03.F27XX.0	21/5	Aton 3x	5W	24V	2700 K	Lens 25°	416,25**	286,50
ATO.03.F30A1.0	ATO.03.F30XX.0	21/5	Aton 3x	5W	24V	3000 K	Lens 25°	438,75**	300,32
ATO.03.F30S1.0	ATO.03.F30XX.0	21/5	Aton 3x	5W	24V	3000 K	Lens 25°	438,75**	300,32
ATO.03.F40A1.0	ATO.03.F40XX.0	21/5	Aton 3x	5W	24V	4000 K	Lens 25°	483,75**	328,25
ATO.03.F40S1.0	ATO.03.F40XX.0	21/5	Aton 3x	5W	24V	4000 K	Lens 25°	483,75**	328,25
ATO.02.F27A1.0	ATO.02.F27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Lens 25°	459,20**	298,51
ATO.02.F27S1.0	ATO.02.F27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Lens 25°	459,20**	298,51
ATO.02.F30A1.0	ATO.02.F30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Lens 25°	481,60**	312,88
ATO.02.F30S1.0	ATO.02.F30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Lens 25°	481,60**	312,88
ATO.02.F40A1.0	ATO.02.F40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Lens 25°	526,40**	341,94
ATO.02.F40S1.0	ATO.02.F40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Lens 25°	526,40**	341,94
ATO.02.F27A1.0	ATO.02.F27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Lens 25°	615,00**	404,37
ATO.02.F27S1.0	ATO.02.F27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Lens 25°	615,00**	404,37
ATO.02.F30A1.0	ATO.02.F30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Lens 25°	645,00**	423,82
ATO.02.F30S1.0	ATO.02.F30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Lens 25°	645,00**	423,82
ATO.02.F40A1.0	ATO.02.F40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Lens 25°	705,00**	463,19
ATO.02.F40S1.0	ATO.02.F40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Lens 25°	705,00**	463,19
ATO.04.F27A1.0	ATO.04.F27XX.0	21/5	Aton 4x	7W	24V	2700 K	Lens 25°	615,00**	404,37
ATO.04.F27S1.0	ATO.04.F27XX.0	21/5	Aton 4x	7W	24V	2700 K	Lens 25°	615,00**	404,37
ATO.04.F30A1.0	ATO.04.F30XX.0	21/5	Aton 4x	7W	24V	3000 K	Lens 25°	645,00**	423,82
ATO.04.F30S1.0	ATO.04.F30XX.0	21/5	Aton 4x	7W	24V	3000 K	Lens 25°	645,00**	423,82
ATO.04.F40A1.0	ATO.04.F40XX.0	21/5	Aton 4x	7W	24V	4000 K	Lens 25°	705,00**	463,19
ATO.04.F40S1.0	ATO.04.F40XX.0	21/5	Aton 4x	7W	24V	4000 K	Lens 25°	705,00**	463,19
ATO.01.W27A1.0	ATO.01.W27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Lens 35°	344,40**	193,03
ATO.01.W27S1.0	ATO.01.W27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Lens 35°	344,40**	193,03
ATO.01.W30A1.0	ATO.01.W30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Lens 35°	361,20**	202,34
ATO.01.W30S1.0	ATO.01.W30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Lens 35°	361,20**	202,34
ATO.01.W40A1.0	ATO.01.W40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Lens 35°	394,80**	221,16
ATO.01.W40S1.0	ATO.01.W40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Lens 35°	394,80**	221,16
ATO.01.W27A1.0	ATO.01.W27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Lens 35°	416,25**	259,55
ATO.01.W27S1.0	ATO.01.W27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Lens 35°	416,25**	259,55
ATO.01.W30A1.0	ATO.01.W30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Lens 35°	438,75**	272,07
ATO.01.W30S1.0	ATO.01.W30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Lens 35°	438,75**	272,07
ATO.01.W40A1.0	ATO.01.W40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Lens 35°	483,75**	297,37

Product code	Code	Release date	Product	Power	Supply	CCT	Optics	lux (lm) *tj=25 °C	Fixture Flux (lm)
ATO.01.W40S1.0	ATO.01.W40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Lens 35°	483,75**	297,37
ATO.03.W27A1.0	ATO.03.W27XX.0	21/5	Aton 3x	5W	24V	2700 K	Lens 35°	416,25**	259,55
ATO.03.W27S1.0	ATO.03.W27XX.0	21/5	Aton 3x	5W	24V	2700 K	Lens 35°	416,25**	259,55
ATO.03.W30A1.0	ATO.03.W30XX.0	21/5	Aton 3x	5W	24V	3000 K	Lens 35°	438,75**	272,07
ATO.03.W30S1.0	ATO.03.W30XX.0	21/5	Aton 3x	5W	24V	3000 K	Lens 35°	438,75**	272,07
ATO.03.W40A1.0	ATO.03.W40XX.0	21/5	Aton 3x	5W	24V	4000 K	Lens 35°	483,75**	297,37
ATO.03.W40S1.0	ATO.03.W40XX.0	21/5	Aton 3x	5W	24V	4000 K	Lens 35°	483,75**	297,37
ATO.02.W27A1.0	ATO.02.W27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Lens 35°	459,20**	269,40
ATO.02.W27S1.0	ATO.02.W27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Lens 35°	459,20**	269,40
ATO.02.W30A1.0	ATO.02.W30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Lens 35°	481,60**	282,36
ATO.02.W30S1.0	ATO.02.W30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Lens 35°	481,60**	282,36
ATO.02.W40A1.0	ATO.02.W40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Lens 35°	526,40**	308,59
ATO.02.W40S1.0	ATO.02.W40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Lens 35°	526,40**	308,59
ATO.02.W27A1.0	ATO.02.W27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Lens 35°	615,00**	364,93
ATO.02.W27S1.0	ATO.02.W27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Lens 35°	615,00**	364,93
ATO.02.W30A1.0	ATO.02.W30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Lens 35°	645,00**	382,48
ATO.02.W30S1.0	ATO.02.W30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Lens 35°	645,00**	382,48
ATO.02.W40A1.0	ATO.02.W40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Lens 35°	705,00**	418,02
ATO.02.W40S1.0	ATO.02.W40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Lens 35°	705,00**	418,02
ATO.04.W27A1.0	ATO.04.W27XX.0	21/5	Aton 4x	7W	24V	2700 K	Lens 35°	615,00**	364,93
ATO.04.W27S1.0	ATO.04.W27XX.0	21/5	Aton 4x	7W	24V	2700 K	Lens 35°	615,00**	364,93
ATO.04.W30A1.0	ATO.04.W30XX.0	21/5	Aton 4x	7W	24V	3000 K	Lens 35°	645,00**	382,48
ATO.04.W30S1.0	ATO.04.W30XX.0	21/5	Aton 4x	7W	24V	3000 K	Lens 35°	645,00**	382,48
ATO.04.W40A1.0	ATO.04.W40XX.0	21/5	Aton 4x	7W	24V	4000 K	Lens 35°	705,00**	418,02
ATO.04.W40S1.0	ATO.04.W40XX.0	21/5	Aton 4x	7W	24V	4000 K	Lens 35°	705,00**	418,02
ATO.01.W90A1.0	ATO.01.W90XX.0	21/5	Aton 1x	4W	24V	RGB	Lens 45°	105,00*	57,83
ATO.01.W90S1.0	ATO.01.W90XX.0	21/5	Aton 1x	4W	24V	RGB	Lens 45°	105,00*	57,83
ATO.01.W90A1.0	ATO.01.W90XX.0 R	21/5	Aton 1x	4W	24V	RGB (Rosso)	Lens 45°	35,00*	21,60
ATO.01.W90S1.0	ATO.01.W90XX.0 R	21/5	Aton 1x	4W	24V	RGB (Rosso)	Lens 45°	35,00*	21,60
ATO.01.W90A1.0	ATO.01.W90XX.0 G	21/5	Aton 1x	4W	24V	RGB (Verde)	Lens 45°	57,00*	35,79
ATO.01.W90S1.0	ATO.01.W90XX.0 G	21/5	Aton 1x	4W	24V	RGB (Verde)	Lens 45°	57,00*	35,79
ATO.01.W90A1.0	ATO.01.W90XX.0 B	21/5	Aton 1x	4W	24V	RGB (Blu)	Lens 45°	13,00*	8,53
ATO.01.W90S1.0	ATO.01.W90XX.0 B	21/5	Aton 1x	4W	24V	RGB (Blu)	Lens 45°	13,00*	8,53
ATO.01.S90A1.0	ATO.01.S90XX.0	21/5	Aton 1x	4W	24V	RGB	Satin Glass	105,00*	33,42
ATO.01.S90S1.0	ATO.01.S90XX.0	21/5	Aton 1x	4W	24V	RGB	Satin Glass	105,00*	33,42
ATO.01.S90A1.0	ATO.01.S90XX.0 R	21/5	Aton 1x	4W	24V	RGB (Rosso)	Satin Glass	35,00*	12,32
ATO.01.S90S1.0	ATO.01.S90XX.0 R	21/5	Aton 1x	4W	24V	RGB (Rosso)	Satin Glass	35,00*	12,32
ATO.01.S90A1.0	ATO.01.S90XX.0 G	21/5	Aton 1x	4W	24V	RGB (Verde)	Satin Glass	57,00*	20,41
ATO.01.S90S1.0	ATO.01.S90XX.0 G	21/5	Aton 1x	4W	24V	RGB (Verde)	Satin Glass	57,00*	20,41
ATO.01.S90A1.0	ATO.01.S90XX.0 B	21/5	Aton 1x	4W	24V	RGB (Blu)	Satin Glass	13,00*	4,87
ATO.01.S90S1.0	ATO.01.S90XX.0 B	21/5	Aton 1x	4W	24V	RGB (Blu)	Satin Glass	13,00*	4,87
ATO.01.S27A1.0	ATO.01.S27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Satin Glass	344,40**	132,08
ATO.01.S27S1.0	ATO.01.S27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Satin Glass	344,40**	132,08
ATO.01.S30A1.0	ATO.01.S30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Satin Glass	361,20**	138,45
ATO.01.S30S1.0	ATO.01.S30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Satin Glass	361,20**	138,45
ATO.01.S40A1.0	ATO.01.S40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Satin Glass	394,80**	151,33
ATO.01.S40S1.0	ATO.01.S40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Satin Glass	394,80**	151,33
ATO.01.S27A1.0	ATO.01.S27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Satin Glass	416,25**	177,60
ATO.01.S27S1.0	ATO.01.S27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Satin Glass	416,25**	177,60
ATO.01.S30A1.0	ATO.01.S30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Satin Glass	438,75**	186,16
ATO.01.S30S1.0	ATO.01.S30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Satin Glass	438,75**	186,16
ATO.01.S40A1.0	ATO.01.S40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Satin Glass	483,75**	203,47
ATO.01.S40S1.0	ATO.01.S40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Satin Glass	483,75**	203,47
ATO.03.S27A1.0	ATO.03.S27XX.0	21/5	Aton 3x	5W	24V	2700 K	Satin Glass	416,25**	177,60
ATO.03.S27S1.0	ATO.03.S27XX.0	21/5	Aton 3x	5W	24V	2700 K	Satin Glass	416,25**	177,60
ATO.03.S30A1.0	ATO.03.S30XX.0	21/5	Aton 3x	5W	24V	3000 K	Satin Glass	438,75**	186,16
ATO.03.S30S1.0	ATO.03.S30XX.0	21/5	Aton 3x	5W	24V	3000 K	Satin Glass	438,75**	186,16
ATO.03.S40A1.0	ATO.03.S40XX.0	21/5	Aton 3x	5W	24V	4000 K	Satin Glass	483,75**	203,47
ATO.03.S40S1.0	ATO.03.S40XX.0	21/5	Aton 3x	5W	24V	4000 K	Satin Glass	483,75**	203,47
ATO.02.S27A1.0	ATO.02.S27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Satin Glass	459,20**	176,32
ATO.02.S27S1.0	ATO.02.S27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Satin Glass	459,20**	176,32
ATO.02.S30A1.0	ATO.02.S30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Satin Glass	481,60**	184,80
ATO.02.S30S1.0	ATO.02.S30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Satin Glass	481,60**	184,80
ATO.02.S40A1.0	ATO.02.S40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Satin Glass	526,40**	201,97
ATO.02.S40S1.0	ATO.02.S40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Satin Glass	526,40**	201,97
ATO.02.T27A1.0	ATO.02.T27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Satin Glass	615,00**	238,84
ATO.02.T27S1.0	ATO.02.T27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Satin Glass	615,00**	238,84
ATO.02.T30A1.0	ATO.02.T30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Satin Glass	645,00**	250,33
ATO.02.T30S1.0	ATO.02.T30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Satin Glass	645,00**	250,33
ATO.02.T40A1.0	ATO.02.T40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Satin Glass	705,00**	273,59
ATO.02.T40S1.0	ATO.02.T40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Satin Glass	705,00**	273,59
ATO.04.T27A1.0	ATO.04.T27XX.0	21/5	Aton 4x	7W	24V	2700 K	Satin Glass	615,00**	238,84
ATO.04.T27S1.0	ATO.04.T27XX.0	21/5	Aton 4x	7W	24V	2700 K	Satin Glass	615,00**	238,84
ATO.04.T30A1.0	ATO.04.T30XX.0	21/5	Aton 4x	7W	24V	3000 K	Satin Glass	645,00**	250,33
ATO.04.T30S1.0	ATO.04.T30XX.0	21/5	Aton 4x	7W	24V	3000 K	Satin Glass	645,00**	250,33
ATO.04.T40A1.0	ATO.04.T40XX.0	21/5	Aton 4x	7W	24V	4000 K	Satin Glass	705,00**	273,59
ATO.04.T40S1.0	ATO.04.T40XX.0	21/5	Aton 4x	7W	24V	4000 K	Satin Glass	705,00**	273,59
ATO.01.T90A1.0	ATO.01.T90XX.0	21/5	Aton 1x	4W	24V	RGB	Trasparent Glass	105,00*	38,14
ATO.01.T90S1.0	ATO.01.T90XX.0	21/5	Aton 1x	4W	24V	RGB	Trasparent Glass	105,00*	38,14
ATO.01.T90A1.0	ATO.01.T90XX.0 R	21/5	Aton 1x	4W	24V	RGB (Rosso)	Trasparent Glass	35,00*	13,58
ATO.01.T90S1.0	ATO.01.T90XX.0 R	21/5	Aton 1x	4W	24V	RGB (Rosso)	Trasparent Glass	35,00*	13,58
ATO.01.T90A1.0	ATO.01.T90XX.0 G	21/5	Aton 1x	4W	24V	RGB (Verde)	Trasparent Glass	57,00*	22,50
ATO.01.T90S1.0	ATO.01.T90XX.0 G	21/5	Aton 1x	4W	24V	RGB (Verde)	Trasparent Glass	57,00*	22,50

Product code	Code	Release date	Product	Power	Supply	CCT	Optics	lux (lm) *tj=25 **	Fixture Flux (lm)
ATO.01.T90A1.0	ATO.01.T90XX.0 B	21/5	Aton 1x	4W	24V	RGB (Blu)	Trasparent Glass	13,00*	5,36
ATO.01.T90S1.0	ATO.01.T90XX.0 B	21/5	Aton 1x	4W	24V	RGB (Blu)	Trasparent Glass	13,00*	5,36
ATO.01.T27A1.0	ATO.01.T27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Trasparent Glass	344,40**	145,68
ATO.01.T27S1.0	ATO.01.T27XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	2700 K	Trasparent Glass	344,40**	145,68
ATO.01.T30A1.0	ATO.01.T30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Trasparent Glass	361,20**	152,70
ATO.01.T30S1.0	ATO.01.T30XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	3000 K	Trasparent Glass	361,20**	152,70
ATO.01.T40A1.0	ATO.01.T40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Trasparent Glass	394,80**	166,90
ATO.01.T40S1.0	ATO.01.T40XX.0 350mA	21/5	Aton 3x	3x1W	350 mA	4000 K	Trasparent Glass	394,80**	166,90
ATO.01.T27A1.0	ATO.01.T27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Trasparent Glass	416,25**	195,88
ATO.01.T27S1.0	ATO.01.T27XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	2700 K	Trasparent Glass	416,25**	195,88
ATO.01.T30A1.0	ATO.01.T30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Trasparent Glass	438,75**	205,32
ATO.01.T30S1.0	ATO.01.T30XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	3000 K	Trasparent Glass	438,75**	205,32
ATO.01.T40A1.0	ATO.01.T40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Trasparent Glass	483,75**	224,42
ATO.01.T40S1.0	ATO.01.T40XX.0 500mA	21/5	Aton 3x	3x1,5W	500 mA	4000 K	Trasparent Glass	483,75**	224,42
ATO.03.T27A1.0	ATO.03.T27XX.0	21/5	Aton 3x	5W	24V	2700 K	Trasparent Glass	416,25**	195,88
ATO.03.T27S1.0	ATO.03.T27XX.0	21/5	Aton 3x	5W	24V	2700 K	Trasparent Glass	416,25**	195,88
ATO.03.T30A1.0	ATO.03.T30XX.0	21/5	Aton 3x	5W	24V	3000 K	Trasparent Glass	438,75**	205,32
ATO.03.T30S1.0	ATO.03.T30XX.0	21/5	Aton 3x	5W	24V	3000 K	Trasparent Glass	438,75**	205,32
ATO.03.T40A1.0	ATO.03.T40XX.0	21/5	Aton 3x	5W	24V	4000 K	Trasparent Glass	483,75**	224,42
ATO.03.T40S1.0	ATO.03.T40XX.0	21/5	Aton 3x	5W	24V	4000 K	Trasparent Glass	483,75**	224,42
ATO.02.T27A1.0	ATO.02.T27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Trasparent Glass	459,20**	192,76
ATO.02.T27S1.0	ATO.02.T27XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	2700 K	Trasparent Glass	459,20**	192,76
ATO.02.T30A1.0	ATO.02.T30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Trasparent Glass	481,60**	202,03
ATO.02.T30S1.0	ATO.02.T30XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	3000 K	Trasparent Glass	481,60**	202,03
ATO.02.T40A1.0	ATO.02.T40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Trasparent Glass	526,40**	220,80
ATO.02.T40S1.0	ATO.02.T40XX.0 350mA	21/5	Aton 4x	4x1W	350 mA	4000 K	Trasparent Glass	526,40**	220,80
ATO.02.T27A1.0	ATO.02.T27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Trasparent Glass	615,00**	261,11
ATO.02.T27S1.0	ATO.02.T27XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	2700 K	Trasparent Glass	615,00**	261,11
ATO.02.T30A1.0	ATO.02.T30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Trasparent Glass	645,00**	273,67
ATO.02.T30S1.0	ATO.02.T30XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	3000 K	Trasparent Glass	645,00**	273,67
ATO.02.T40A1.0	ATO.02.T40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Trasparent Glass	705,00**	299,10
ATO.02.T40S1.0	ATO.02.T40XX.0 500mA	21/5	Aton 4x	4x1,5W	500 mA	4000 K	Trasparent Glass	705,00**	299,10
ATO.04.T27A1.0	ATO.04.T27XX.0	21/5	Aton 4x	7W	24V	2700 K	Trasparent Glass	615,00**	261,11
ATO.04.T27S1.0	ATO.04.T27XX.0	21/5	Aton 4x	7W	24V	2700 K	Trasparent Glass	615,00**	261,11
ATO.04.T30A1.0	ATO.04.T30XX.0	21/5	Aton 4x	7W	24V	3000 K	Trasparent Glass	645,00**	273,67
ATO.04.T30S1.0	ATO.04.T30XX.0	21/5	Aton 4x	7W	24V	3000 K	Trasparent Glass	645,00**	273,67
ATO.04.T40A1.0	ATO.04.T40XX.0	21/5	Aton 4x	7W	24V	4000 K	Trasparent Glass	705,00**	299,10
ATO.04.T40S1.0	ATO.04.T40XX.0	21/5	Aton 4x	7W	24V	4000 K	Trasparent Glass	705,00**	299,10