
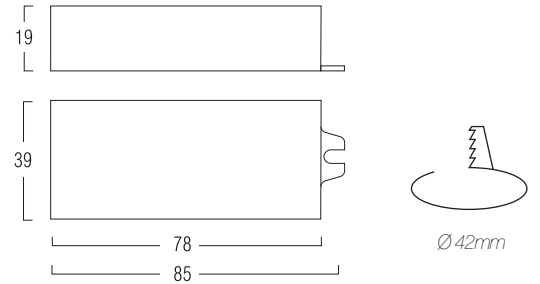


**PSU.0025.0**

350mA, 3-40V

PASSIVE PFC

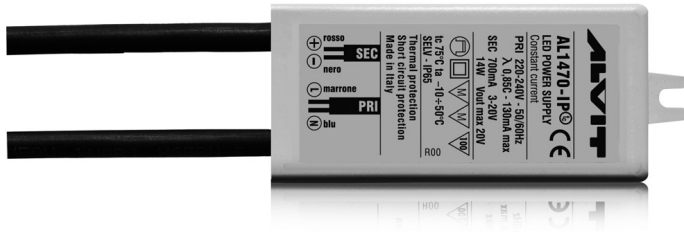

Constant Current

Mains voltage AC	220-240V
Mains voltage DC	176-276V
Mains frequency	0 / 50/60 Hz
Mains current	120 mA
Power factor	0,85 C
Max output current	350mA
Output voltage	3-40V
Max output voltage	40V
Output power	14W
Ambient temperature Ta	-10 ÷ 50° C
Max case temperature on Tc	75°
Weight	0,08 Kg

- > Independent driver
- > Constant current version for power LED
- > Constant voltage version for power LED
- > Degree protection, IP67
- > Cables H05RN-F, L. 180mm
- > Class II protection
- > Short circuit, overload, open circuit and thermal protection
- > High efficiency and absolute reliability
- > Nominal life-time up to 50,000h at tc max
- > Complying with EN61347-2-13, EN61347-1, EN62384, EN55015, EN61000-3-2, EN61547

The product image is indicative only