




## ECG.0006.0 DATA-SHEET

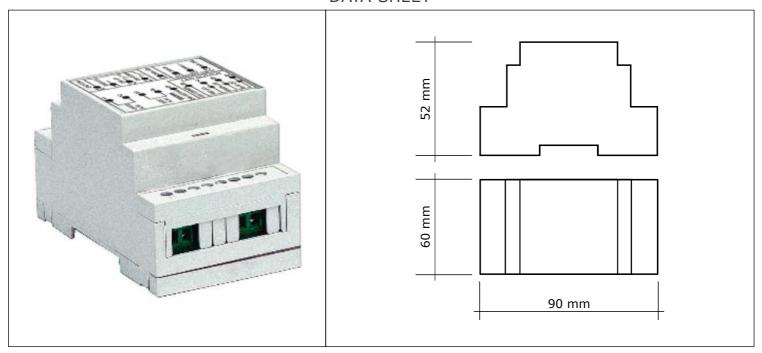

## **PRODUCT DESCRIPTION:**

Dimmer for linear system, spot and downlights family. This device is suitable for constant voltage supply fixtures.

## **TECHNICALS FEATURES:**

power supply max output current max ouput power control input dimming range working temperature max case temperature expected lifetime (at Tc<=75°C) protection class max connecting wire cross section installation dimensions (LxWxH) weight 24 Vdc 3 channels 2 A each channel 144 W (max 48 W each channel) DMX standard USITT512 (RDM 2.0 compatible) self learning, addressing mode 0%-100% -10 ÷ 54 °C 65 °C >100000h IP20 1,5 mm<sup>2</sup> DIN bar mounting 90x60x52 mm 100g




10823.180924





ECG.0006.0 DATA-SHEET

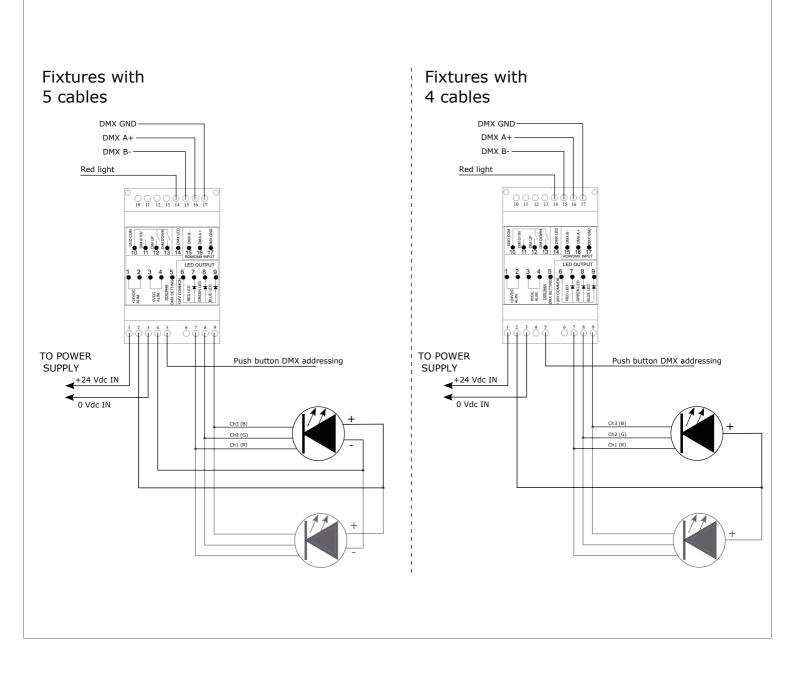

## **OPERATING MODE:**

To set DMX address connect the DMX generator to wire A and B, red light in position 19 will blink correctly if DMX is connected.

Set DMX generator to the max value on the desired channel, (for example channel 6=255) then push and hold DMX set button on the box in connector position 13.

The red LED on board stay on 3 second then blink to indicate the setting is complete. Be careful that the A and B wires are properly connected.